
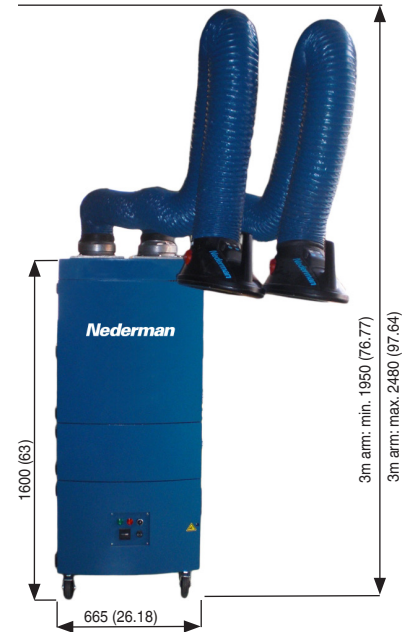


## Weldfilter Mobil Extraction/Filter Units

### WeldFilter C20

WeldFilter mobile filter unit for light welding extraction applications.

- Easy to move and position
- Includes two x 3 meter (10 ft.) long Extraction Arm Original.
- Two cleanable filters with high filtration efficiency and easy to replace
- Service hour meter
- Alarm for low air flow (time to clean or replace the cartridge)

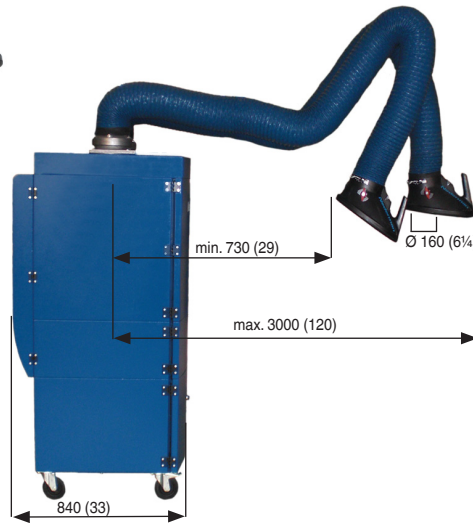

Arm length m (ft.)	Arm Ø, mm (in.)	Max. airflow <sup>1)</sup> , m <sup>3</sup> /h (cfm)	Filter efficiency, %	Filter area, m <sup>2</sup> (sq. ft.)	Voltage, V/ electrical plug	Power, kW (Hp)	Frequency, Hz	Phase	Noice level dB (A)	Weight, kg (lbs)	Part no.
3 (10)	160 (6 ¼)	2 x 500-900 (300-530)	≥ 99	2 x 12 (125)	400/EUR <sup>2)</sup>	2.2 (3.0)	50	3	75	245 (540)	12621151
3 (10)	160 (6 ¼)	2 x 500-900 (300-530)	≥ 99	2 x 12 (125)	200/JP <sup>2)</sup>	2.2 (3.0)	50	3	75	245 (540)	12621251
3 (10)	160 (6 ¼)	2 x 500-900 (300-530)	≥ 99	2 x 12 (125)	200/JP <sup>2)</sup>	2.2 (3.0)	60	3	75	245 (540)	12621351

<sup>1)</sup> Maximum 2 x 1100 m<sup>3</sup>/h (650 cfm) without extraction arms.

<sup>2)</sup> Without male plug.

Accessories	Part no.
Spark protection, for mounting in the hood. To reduce risk of fire.	10551335

Replacement filter	Part no.
12m <sup>2</sup> spound bound polyester with PTFE lamination ≥ 99% efficiency for welding fume. Measured according to the test procedure in EN 15012-1.	12375379

Warning: The information in this document is subject to change without notice.

Product availability may differ by country